

## HSAD16/110VDC S

- Two-port surge arresters type T3 for serial connection.
- Intended for protection of electronic appliances against the effects of switching, induced and residual overvoltage in DC power supply systems.
- Contains an improved thermal fuse which ensures timely disconnection of the device from the power grid during overheating and thus prevents damage.
- Activation of the thermal fuse is signalled by an integral indicator light.
- Installed at the boundaries of LPZ 2 – LPZ 3, as close as possible to the protected device (no further than 5 m).
- In front of HSAD16/\*VDC S must be installed a lightning current and surge arrester T1 and T2 from HAKEL company.
- **S** indication specifies a version with remote monitoring.

Type		HSAD16/110VDC S
Test class according to EN 61643-11:2012 (IEC 61643-11:2011)		T3
System		DC
Rated operating DC voltage	$U_N$	110 V
Maximum continuous operating voltage DC	$U_C$	132 V
Rated load current	$I_L$	16 A
Open circuit voltage of the combination wave generator	$U_{OC}$	6 kV
Voltage protection level at $U_{OC}$ (+/-)	$U_p$	< 0.5 kV
Voltage protection level at $U_{OC}$ ( $\pm$ /PE)	$U_p$	< 0.8 kV
Nominal discharge current for class II test (8/20)	$I_n$	3 kA
Total discharge current (8/20) $\pm$ ->PE	$I_{Total}$	6 kA
Response time (+/-)	$t_A$	< 25 ns
Response time ( $\pm$ /PE)	$t_A$	< 100 ns
Maximal back-up fuse		16 A gL/gG
Residual current	$I_{PE}$	$\leq 5 \mu A$
Short-circuit current rating at maximum back-up fuse	$I_{SCCR}$	6 kA <sub>rms</sub>
Lightning protection zone		LPZ 2-3
Housing material		Polyamid PA6, UL94 V-0
Degree of protection		IP20
Operating temperature	$\vartheta$	-40 ÷ 55 °C
Humidity range	RH	5 ÷ 95 %
Recommended cross-section of connected conductors	S	2.5 mm <sup>2</sup>
Clamp fastening range (solid conductor)		0.2 ÷ 6 mm <sup>2</sup>
Clamp fastening range (stranded conductor)		0.2 ÷ 4 mm <sup>2</sup>
Tightening moment		0,5 Nm
Installation		On DIN rail 35 mm
Modular width		3 TE
Operating position		Any


Type	HSAD16/110VDC S	
Product placement environment	Internal	
Signalling at the device	Optic	
Importance of local signaling	OK – red light off FAULT – red light on	
Remote signalling	Yes	
Potential free signal contact (S) (recommended cross-section of remote monitoring max. 1 mm <sup>2</sup> )	AC: 250 V / 1.5 A, DC: 250 V / 0.1 A	
Includes EMI / EMC filter	No	
Modular design	No	
Lifetime	> 100 000 h	
<b>Designed according to standards</b>		
Requirements and test methods for SPDs connected to low-voltage power systems	IEC 61643-11:2011	
Safety of Flammability of Plastic Materials	UL 94	
<b>Application standards</b>		
Protection against lightning	IEC 62305:2010	
Selection and erection of electrical equipment – Switchgear and controlgear	HD 60364-5-53:2022	
Selection and application principles for SPDs connected to low-voltage power systems	CLC/TS 61643-12:2009	
<b>Ordering, packaging and additional data</b>		
Mass	m	95 g
Mass (including the packaging)	m	119 g
Packaging dimensions (H x W x D)	60 x 113 x 73 mm	
Packaging value	V	0.5 dm <sup>3</sup>
ETIM group	EG000021	
ETIM class	EC000942	
Customs tariff no.	85363010	
EAN code	8590681163276	
<b>Art. number</b>	<b>30 292</b>	



The link in the QR code leads to the online presentation of the HSAD16/110VDC S. There, in addition to the always up-to-date data sheet, you will also find all diagrams and drawings, declarations of conformity, or 2D or 3D models and other necessary materials. For more information, visit [www.hakil.com](http://www.hakil.com)



### Application wiring diagram (installation)

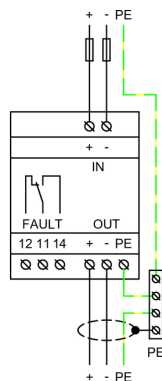

### Internal diagram

